


**Cross Section**

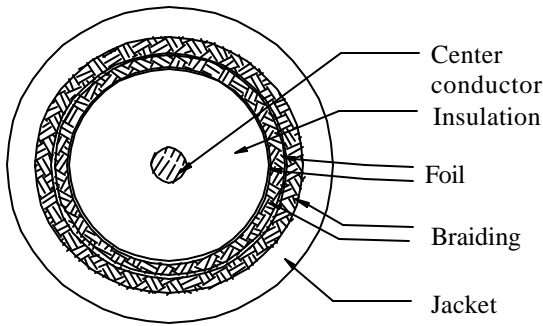

**Marking**

E223070 (UL) CM RG-6/U QUAD SHIELD 18 AWG 75C---CATV 3.0GHZ TESTED  
 \*\*\*\*\*FEET

**Description**

**Reference Standard**  
 SCTE IPS-SP-001, UL1655, UL13, UL444

**Construction**

<b>Conductor</b>	<b>Copper Clad Steel</b>
AWG	18
Dia.	1.02
<b>Insulation</b>	<b>Skin Foamed PE</b>
Nom. Thickness(mm)	1.78
Insulation Dia. (±0.08mm)	4.57
The first Al-maylar Shield (Overlapping, %)	>=25
<b>The first Braid Shield</b>	<b>Aluminum Wire</b>
Construction (mm)	16/4/0.16
Coverage Area (%)	>=60
The Second Al-maylar Shield (Overlapping, %)	>=25
<b>The Second Braid Shield</b>	<b>Aluminum Wire</b>
Construction (mm)	16/3/0.16
Coverage Area (%)	>=40
<b>Jacket</b>	<b>PVC</b>
Nom. Thickness (mm)	0.65
Min. Thickness(mm)	0.50
Cable Dia.(±0.20mm)	7.30

**Color**

**Jacket Color:** Black, White  
 Per Customer Request

Ref. spec No. : RG-6Q Rev.: 3

**Packing Type**

Reel, Pull-box, Reel in a box

**Performance**

**Electrical Characteristics:**

Frequency (MHz)	Attenuation (dB/100m)
1	0.89
10	2.66
50	4.79
100	6.72
200	9.28
400	13.28
700	18.36
900	20.43
1000	21.61
1200	23.67
1450	26.03
1800	28.98
2200	32.03
2400	32.83
3000	37.88

Dielectric Strength (kV/min)	1.0
Impedence (±3.0ohms)	75.0
SRL (dB,5~1000MHz)	>=20
Capacitance (pF/m)	53.1
Conductor DCR @ 20°C (ohms/km)	<=21.4
Velocity Of Propagation (%)	>=82


**Mechanical Characteristics:**

<b>Test Object</b>	<b>Jacket</b>
Test Material	PVC
Before Tensile Strength (Mpa)	>=1.034
Aging Elongation (%)	>=200
Aging Condition (°C×hrs)	113.0±1.0 × 168
After Tensile Strength (Mpa)	>= 85% unaged
Aging Elongation (%)	>= 50% unaged
Cold Bend (-20±2°C×4hrs)	No crack
Jacket impact test(-15°C)	No crack
Jacket Longitudinal Shrinkage (%)	<=5

18801 Black  
 18802 White

Prepared by: Song Wu 2005.6.27 Rev.:3  
 Approved by: David Kim 2005.6.27 Page 1 of 1

Cross Section

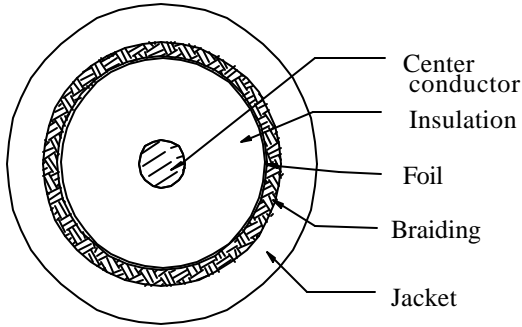

Marking

E223070 (UL) CM RG-6/U 18AWG 75C --- CATV 3.0GHZ TESTED \*\*\*\*\* FT

Description

Rated Temperature (°C)	75
Product Standard Certification	UL
Flammability Test	CM

Application

Drop cable for CATV and MATV distribution UV resistant

Reference Standard

SCTE IPS-SP-001, UL1655, UL13, UL444 TFC DROP CABLE

Construction

<b>Center Conductor</b>	<b>Copper Clad Steel</b>
AWG	18
Dia.	1.02
<b>Insulation</b>	<b>Skin Foam PE</b>
Nom. Thickness(mm)	1.78
Insulation Dia. (±0.08mm)	4.57
Al-maylar Shield (Overlapping, %)	>=25
<b>Braid Shield</b>	<b>Aluminium Wire</b>
Construction (mm)	16/4/0.16
Coverage Area (%)	>=60
<b>Jacket</b>	<b>PVC</b>
Nom. Thickness (mm)	0.75
Min. Thickness(mm)	0.64
Cable Dia.(±0.15mm)	6.90
<b>Weight (kg/km)</b>	43.4

Color

Jacket Color:

Color

Jacket Color: Black, White  
Per Customer Request

Ref. spec No. : RG6-60% Rev.: 3

Packing Type

l, Pull-box, Reel in a box

Performance

Electrical Characteristics:

Frequency (MHz)	Attenuation (dB/100m)
5	2.66
55	5.25
211	10.1
250	11.02
270	11.48
300	12.14
350	13.15
400	14.11
450	15.03
500	15.88
550	16.7
600	17.52
750	19.69
870	21.33
1000	22.97
1250	25.00
1450	26.37
2200	31.16
2400	32.83
3000	37.88

Dielectric Strength (kV/min)	1.0
Impedence (±3.0ohms)	75.0
SRL (dB,5~2200MHz)	>=20
Capacitance (pF/m)	53.1
Conductor DCR@ 20°C (ohms/km)	<=119
DC Loop Resistance@ 20°C (ohms/km)	<=152
Velocity Of Propagation (%)	>=82

Mechanical Characteristics:

Test Object	Jacket
Test Material	PVC
Before Tensile Strength (Mpa)	>=1.034
Aging Elongation (%)	>=200
Aging Condition (°C×hrs)	113.0±1.0 × 168
After Tensile Strength (Mpa)	>= 85% unaged
Aging Elongation (%)	>= 50% unaged
Cold Bend (-20±2°C×4hrs)	No crack
Jacket impact test(-15°C)	No crack
Jacket Longitudinal Shrinkage (%)	<=5
Center Conductor Break Strength (N)	>=641
Center Conductor Bond To dielectric (N)	>=2.3

30401 Black  
30402 White

WAVENET, INC. TEL 310-329-5555

Prepared by: Song Wu 2005.6.27 Rev.:3

Approved by: David Kim 2005.6.27 Page 1 of 1