


SECURITY CABLE 22 AWG / 2 CONDUCTOR

UL TYPE CMR/CL2R

STRANDED TYPE

ITEM # SC 22202-S

CONSTRUCTION:

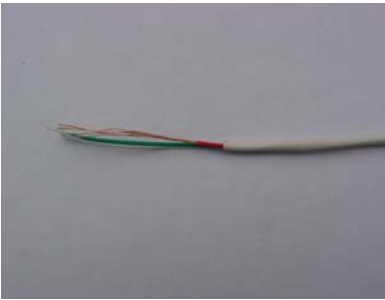

APPLICATION:

Class 2 Power Limited Circuit Cable and Communications Cable for General Purpose Applications

CONDUCTOR:

22 AWG Bare Copper (7/30)

INSULATION:

PVC

Green / Red

Insulation Thickness : 0.006" Nom.

Insulated Conductor Diameter : 0.041" Nom.

JACKET (RIP CORD):

FR-PVC

Jacket Thickness : 0.014" Nom.

Overall Cable Diameter : 0.110" Nom.

Weight : 10.7 Lbs/1,000ft Nom.

ELECTRICAL PROPERTIES:

300 V Max.

16.90 Ohms/1,000ft Nom.

PRINT LEGEND:

E223070 2 COND 22AWG STRANDED CMR-CL2R UL
C(UL) XXXXFT



259 E. REDONDO BEACH BLVD.

GARDENA, CA 90248

T.310.329.5555, 888.492.8363 F.310.327.5165