


## SECURITY CABLE 22 AWG / 4 CONDUCTOR

UL TYPE CMR/CL2R

STRANDED TYPE

ITEM # SC 22402-S

### CONSTRUCTION:

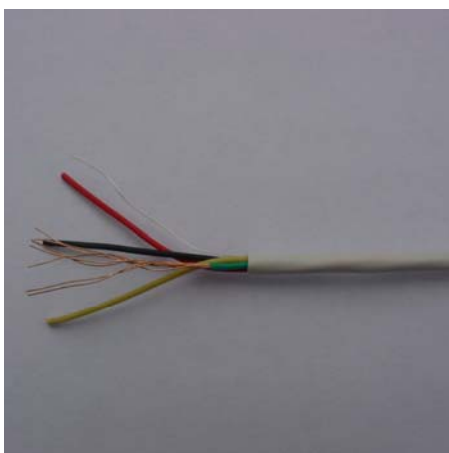

#### APPLICATION:

Class 2 Power Limited Circuit Cable and Communications Cable for General Purpose Applications

#### CONDUCTOR:

22 AWG Bare Copper (7/30)

#### INSULATION:

PVC

Green / Red / Black / Yellow

Insulation Thickness : 0.006" Nom.

Insulated Conductor Diameter : 0.041" Nom.

#### JACKET (RIP CORD):

FR-PVC

Jacket Thickness : 0.014" Nom.

Overall Cable Diameter : 0.126" Nom.

Weight : 15.5 Lbs/1,000ft Nom.

#### ELECTRICAL PROPERTIES:

300 V Max.

16.90 Ohms/1,000ft Nom.

#### PRINT LEGEND:

E223070 4 COND 22AWG STRANDED CMR-CL2R UL  
C(UL) XXXXFT



259 E. REDONDO BEACH BLVD.  
GARDENA, CA 90248

T.310.329.5555, 888.492.8363 F.310.327.5165